


Data Sheet for T-Sc1300

Specifications


Type :	Rechargeable Nickel Cadmium Standard Cell
Model (P/N) :	T-Sc1300
Nominal Dimension : (with sleeve)	$\phi = 22.5 \begin{smallmatrix} 0 \\ -0.5 \end{smallmatrix}$ mm H = $42.5 \pm 0.5$ mm
Applications :	Recommended discharge current 130 to 1300 mA
Nominal Voltage :	1.2V
Nominal Capacity :	1300 mAh when discharge at 260 mA to 1.0 V at 20°C
Standard Charge :	130 mA for 15 hrs at 20°C
Fast Charge :	520 mA (0.4C) with charge termination control Recommended control parameters Timer: 140 % nominal input
Service Life :	> 500 cycles
Continuous Overcharge :	130 mA maximum permissible current No conspicuous deformation and / or leakage
Weight :	48 g
Internal Resistance :	Max 20 m $\Omega$ at 1000 Hz measured within 1 hour after standard charge
Max. Charging Voltage :	1.5 V at 130 mA charging
Ambient Temperature : Range	Standard Charge : 0°C to 45°C Fast Charge : 10°C to 45°C Discharge : -20°C to 45°C Storage : -20°C to 45°C

Characteristics

Charge Curves ( 20 °C )

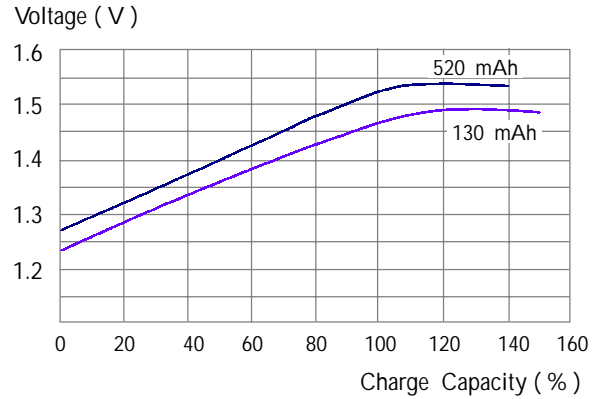

Discharge Curves ( 20 °C )

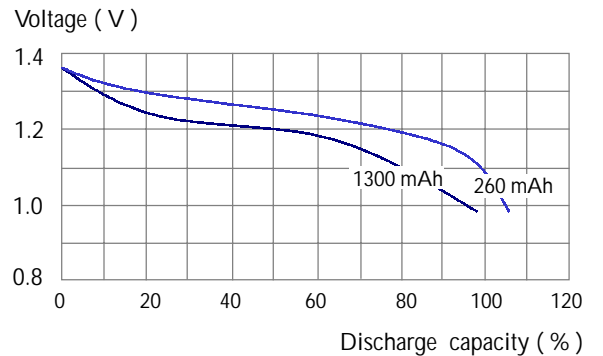

Charge/Discharge Efficiency vs. Temperature

